

RADIATORS



ALL THERM

ELEMENTS PAINTED WITH CATAPHORESIS DOUBLE LAYER
THIRD WORLD WIDE INDUSTRIAL GROUP
CE CONTROL CERTIFICATION

10 YEARS GUARANTY




ALUMINIUM RADIATOR

KAL



RAL 9010

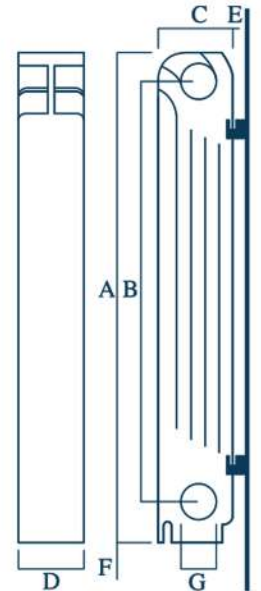

DIMENSIONS Y THERMAL CHARACTERISTICS

MODEL	ISO 3147 - 3150 / EN-442										A	B	C	D	E	F	G	WATER CAPACITY	WEIGHT PER ELEMENT
	ΔT = 60°C		ΔT = 50°C		ΔT = 40°C		ΔT = 30°C		η										
	WATT	KCAL/H	WATT	KCAL/H	WATT	KCAL/H	WATT	KCAL/H											
KAL										MM	MM	MM	MM	MM	MM	INCH	LITRE	KG	
350	129.2	111.1	101.6	87.3	75.7	65	51.8	44.5	1,323	429	350	97	80	25	120	1	0.34	1,2	
500	169.3	145.5	132.3	113.7	97.8	84	66.3	57	1,335	579	500	97	80	25	120	1	0.46	1,5	
600	194.8	167.5	151.7	130.4	111.7	96	75.3	64.7	1,348	679	600	97	80	25	120	1	0.52	1,7	

Output in Watt/hr room temperature through tests according ISO 31 Other Output Q = Qu $\left(\frac{\Delta \tau}{60}\right)^{1.7}$

Maximun Operating Pressure: 800 KPa - Surface Temperature: 120 °C maximum

Version: 05/2018





ALL THERM (GIBRALTAR) LTD

HEADQUARTERS :

World Trade Center
6 Bayside Road 1st Floor - Unit 1.02
GX1 1AA Gibraltar
☎ (+350) 200 60207
✉ info@allthermgroup.com

