

RADIATORS





ALL THERM

ELEMENTS PAINTED WITH CATAPHORESIS DOUBLE LAYER
THIRD WORLD WIDE INDUSTRIAL GROUP
TUV NF CONTROL CERTIFICATION
10 YEARS GUARANTY

ALUMINIUM RADIATOR

DRY

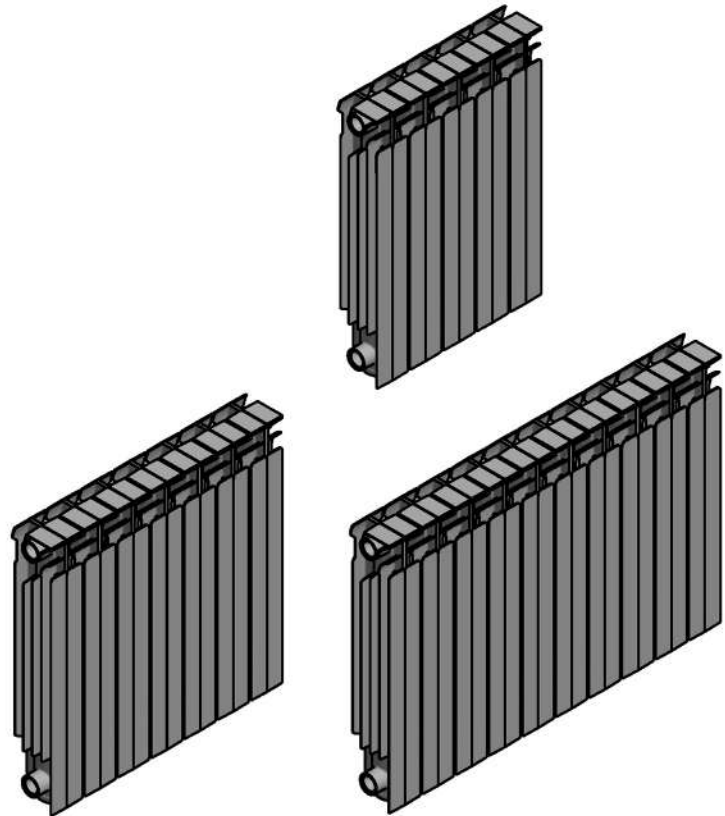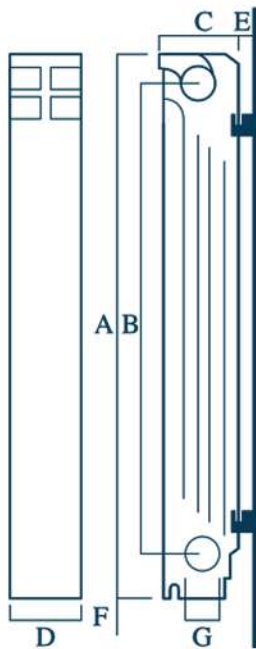

DIMENSIONS Y THERMAL CHARACTERISTICS

MODEL	ISO 3147 - 3150										A	B	C	D	E	F	G	WATER CAPACITY	WEIGHT PER ELEMENT
	ΔT = 60°C			ΔT = 50°C			ΔT = 40°C			η									
	WATT	KCAL/H	BTU/H	WATT	KCAL/H	BTU/H	WATT	KCAL/H	BTU/H										
350	128	110	436	100	86	343	75	64	255	1,323	429	350	97	80	25	120	1	0.34	0.95
500	160	138	547	127	109	432	95	82	324	1,292	579	500	97	80	25	120	1	0.44	1.20
600	189	163	646	148	127	506	110	94	374	1,348	679	600	97	80	25	120	1	0.52	1.42

Output in Watt/hr room temperature through tests according ISO 3147-3150.

Other Output $Q = Q_u \left(\frac{\Delta T}{60} \right)^\eta$



ALL THERM (GIBRALTAR) LTD

HEADQUARTERS :

World Trade Center
6 Bayside Road 1st Floor - Unit 1.02
GX1 1AA Gibraltar
☎ (+350) 200 60207
✉ info@allthermgroup.com

