

RADIATORS



ALL THERM


ELEMENTS PAINTED WITH CATAPHORESIS DOUBLE LAYER
THIRD WORLD WIDE INDUSTRIAL GROUP
TUV NF CONTROL CERTIFICATION

10 YEARS GUARANTY




ALUMINIUM RADIATOR

DUAL

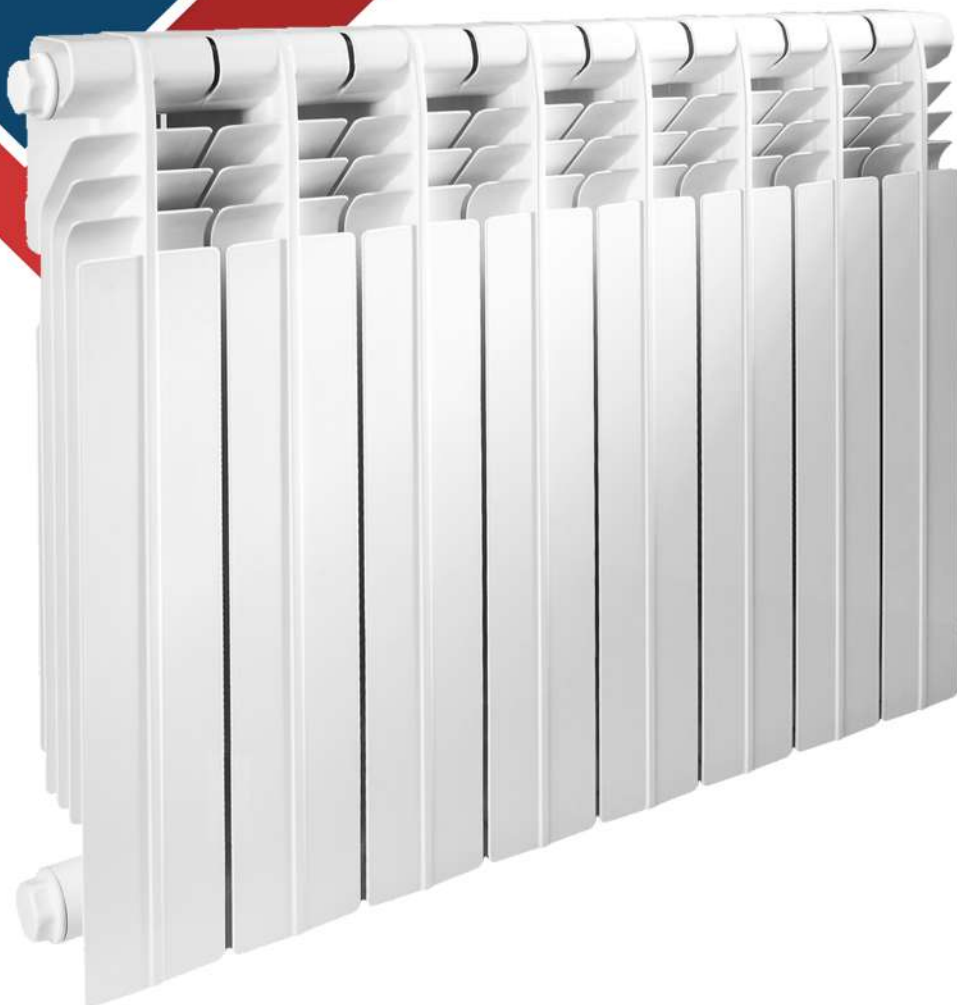

RAL
9010

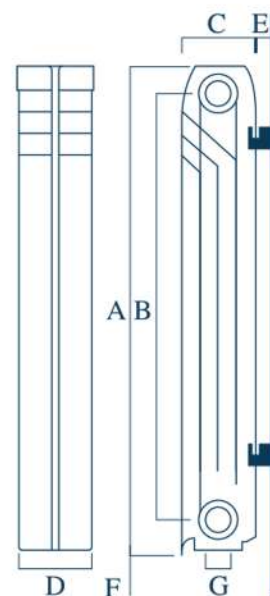

DIMENSIONS Y THERMAL CHARACTERISTICS

| DIMENSIONS Y THERMAL CHARACTERISTICS | | | | | | | | | | | | | | | | | | | |
|--------------------------------------|--------------------------|--------|-------|--------------------------|--------|-------|--------------------------|--------|-------|--------|-----|-----|----|----|----|-----|------|----------------|--------------------|
| MODEL | ISO 3147 - 3150 | | | | | | | | | | A | B | C | D | E | F | G | WATER CAPACITY | WEIGHT PER ELEMENT |
| DUAL | $\Delta T = 60^{\circ}C$ | | | $\Delta T = 50^{\circ}C$ | | | $\Delta T = 40^{\circ}C$ | | | η | MM | MM | MM | MM | MM | MM | INCH | LITRE | KG |
| | WATT | KCAL/H | BTU/H | WATT | KCAL/H | BTU/H | WATT | KCAL/H | BTU/H | | | | | | | | | | |
| 500 | 152 | 131 | 520 | 119 | 102 | 406 | 88 | 76 | 301 | 1.350 | 572 | 500 | 83 | 79 | 25 | 120 | 1 | 0,35 | 1.40 |

Output in Watt/hr a 60°C room temperature through tests according ISO 3147-3150.

Other Output Q = Qu

$$\left(\frac{\Delta \tau}{60}\right)\eta$$



ALL THERM



ALL THERM (GIBRALTAR) LTD

HEADQUARTERS :

World Trade Center
6 Bayside Road 1st Floor – Unit 1.02
GX1 1AA Gibraltar
☎ (+350) 200 60207
✉ info@allthermgroup.com

